




### METAL DETECTORS

Professional detection gate for high-security screening in facilities like courts, hospitals, or schools. It detects objects as small as half a paperclip, pinpointing them with LED indicators. The device is shock-resistant and safe for health (pacemakers, pregnancy). It features 1000 sensitivity levels and easy configuration via a secure remote control.

### MAIN FEATURES

- ⌚ Metal detector DM515 adopts international advanced electromagnetic compatibility design and shock resistant design, has a high sensitivity, strong anti-interference ability and aseismic ability
- ⌚ Able to distinguish ferromagnetic and non-ferromagnetic metal objects
- ⌚ Can detect the size of half a paper clip of metal, no leakage and string
- ⌚ Suitable for controlled knives and guns and other dangerous goods safety inspection, widely used in prisons, courts, schools, hospitals, electronics companies, port, the passenger, exhibition halls, convention centre, major celebrations, concerts and other important places
- ⌚ Two sides of the door body are equipped with LED lights, which can visually display the area where prohibited items are located by positioning lights
- ⌚ Comply with international safety standards, it is harmless to heart pacemaker wearers, pregnant women, magnetic media, etc.
- ⌚ Bilateral contraction infrared can accurately detect the number of people passing through and alarm number
- ⌚ Sensitivity can be adjusted as needed, a total of 1000 sensitivity
- ⌚ 9 types of alarm sound can be selected, each of which has an 8-level adjustable tone and an adjustable alarm time
- ⌚ Use the remote control to set the parameters. The parameters can be password protected, which can't be operated by unauthorized personnel
- ⌚ 11 kinds of frequencies can be set automatically, and different tones can be set at different frequencies. Frequency can also be set manually

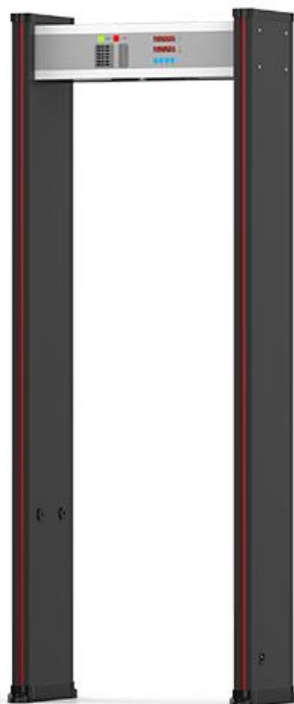

## TECHNICAL DATA

Model	DM515
Outer Dimension (Height*Width*Depth)	2210*840*475 mm
Inner Dimension (Height*Width*Depth)	1980*710*400 mm
Gross Weight	70kg
Working Voltage	AC187V-242V 50/60Hz
Power	<15W
Operation Frequency	Adjust according to the installation environment
Working Temperature	-10 °C ~ 40 °C
Operation Humidity	0 ~ 95% (No freeze)
Detection Defense Zone	18 zones (standard)
Output Connection	PC connection (optional)
Output Connection	Turnstile gate connection (optional)

