

## Office lock for a card

### UZ-CX2172




#### OFFICE LOCK FOR A CARD

UZ-CX2172 is an innovative Uhlmann & Zacher contactless card lock, made in Germany. Its minimalist design makes it suitable for virtually any modern interior. The UZ-CX2172 is a lock that works with a card, chip, key ring and a Bluetooth application. The compact design allows for quick and easy replacement on virtually any door. German quality and precision of workmanship ensure long and safe operation for many years. The card lock enables operation in autonomous, system and mixed modes. Uhlmann & Zacher card locks work both offline and online.

#### MAIN PRODUCT FEATURES

- ⊕ Modern, minimalist design in stainless steel
- ⊕ Intuitive operation thanks to precise LED signaling
- ⊕ Management via Bluetooth app
- ⊕ Operation via radio network: offline or online
- ⊕ The handle works on the Mifare Classic card, Mifare DESfire 13.56MHz, Legic prime and advant 13.56MHz, EM / HITAG, 125 kHz, 868MHz radio
- ⊕ Complies with common European lock standards
- ⊕ Existing locks can be used
- ⊕ Possibility to choose various forms of handles (form L, form U)
- ⊕ A handle suitable for all wooden, steel and aluminum doors with a narrow or wide frame, with a canopy larger than 20 mm
- ⊕ Electronic handle suitable for all doors with a thickness from 30 mm to 110 mm

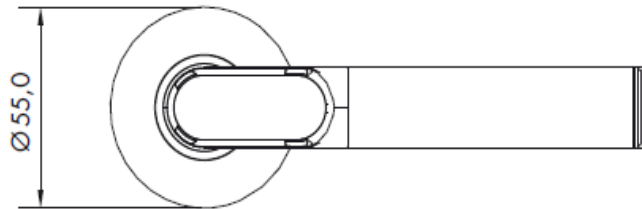

- ⊙ No wiring required
- ⊙ Version with Bluetooth® Low Energy available
- ⊙ Certified for emergency exit locks according to DIN EN 179
- ⊙ Suitable for use on glass doors (round rosette)
- ⊙ Possibility of PVD coating in various color variants

## TECHNICAL DATA

<b>Model</b>	<b>UZ-CX2172</b>
Available transponder versions	Mifare Classic card, Mifare DESfire 13.56MHz, Legic prime and advant 13.56MHz, EM / HITAG, 125 kHz, 868MHz radio transmitter
Bluetooth managing	Yes
Dimensions	Compatibility with all European standards
Short rosette dimensions (Length * Width)	170*46mm
Power supply	1 x CR123A 3V battery
Temperature in operating mode	+ 5 ° C to + 55 ° C (internal version) -25 ° C to + 65 ° C (outdoor version)
Storage temperature	-40°C do +65°C
Appliance	Steel, wooden doors (both external and internal, depending on the version of the device)
Standards	<ul style="list-style-type: none"> <li>• prEN 1687:2015</li> <li>• DIN EN 1906:2012</li> <li>• DIN EN 1634-2:2009</li> <li>• DIN EN 60529:2014</li> <li>• DIN EN 179:2008</li> <li>• 2014/53</li> </ul>