




**MODEL
BW-401**


DATASHEET

GATE DESCRIPTION

- The high gate with a roof provides the highest level of security for access control
- The gate frame is made of stainless steel, which is durable, corrosion-resistant, waterproof, and long-lasting
- It is suitable for both outdoor and indoor use
- The passage width can reach up to 1200 mm for large deliveries and the passage of disabled persons
- Allows connection to any access control system
- Works with any device (e.g., display, counter, reader)
- In the event of a failure, the gate opens automatically to allow passage after power is cut off
- It is suitable for areas with a high level of security. (e.g.: embassy, stadium, bank, prison, oil field, construction site, station)

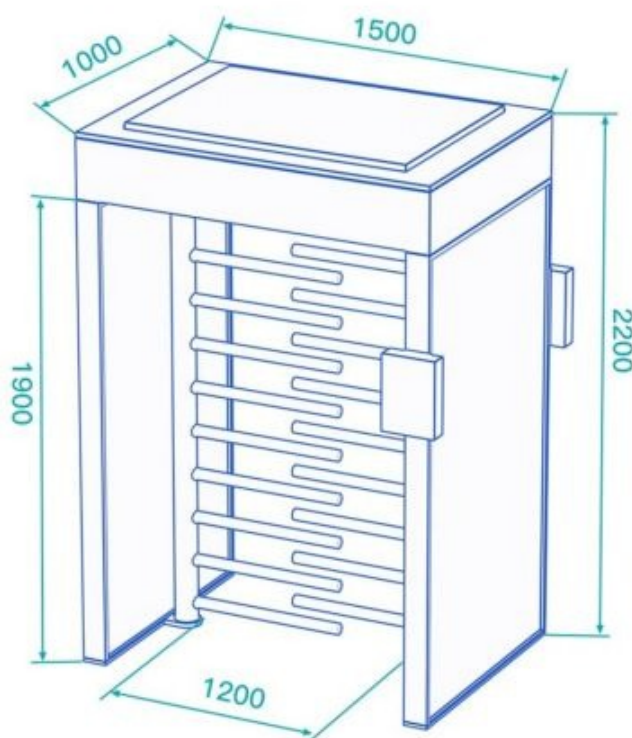


MAIN FEATURES OF THE GATE



TWO-WAY OPERATION



**BUILT-IN LED
SIGNALING**



MOTORIZED GATE



**EMERGENCY
CONTROL**



**STAINLESS STEEL
HOUSING**



**CONNECTIVITY OPTION
ACCESS CONTROL
OR TIME ATTENDANCE
REGISTRATION SYSTEM**

TECHNICAL DATA

Material	Stainless steel 304
Dimensions	1500 x 1000 x 2200 mm
Net weight	300 kg
Passage width	1200 mm
Direction of passage	Optional: one-way or two-way
Power supply	AC220V/110V, 50/60Hz
Voltage	24V DC
Power consumption	40W
Operating temperature	-15°C - +60°C
Air humidity	0-95%
Work environment	External/Internal
Throughput	35-40 people
Emergency opening	Automatic lowering of arms after power disconnection
Communication	Wireless stick, relay signal, RS485