

Lock cylinder

UZ-CX2122


LOCK CYLINDER

UZ-CX2122 is an electronic cylinder with a mechanical knob for a proximity card (eg Mifare 13.56MHz) and an 868MHz radio transmitter. The device is perfect for mounting on wooden, steel and glass doors. It works in different modes.

MAIN FEATURES

- ⊗ Integrated timer and weekly schedule
- ⊗ Possibility to connect to the IDS module
- ⊗ The switching function is possible without any additional energy consumption
- ⊗ Two batteries last for 80,000 cycles
- ⊗ Battery replacement is possible only after obtaining authorization for it
- ⊗ No wiring required
- ⊗ Modular construction
- ⊗ Dismantling can only be done with the dismantling card
- ⊗ Various lengths of profile cylinders available
- ⊗ Anti-panic version available
- ⊗ Outdoor (IP66) and indoor (IP54) versions available
- ⊗ Possible PVD coating in gold, anthracite and brown colors
- ⊗ Radio version available
- ⊗ Version with Bluetooth® Low Energy available
- ⊗



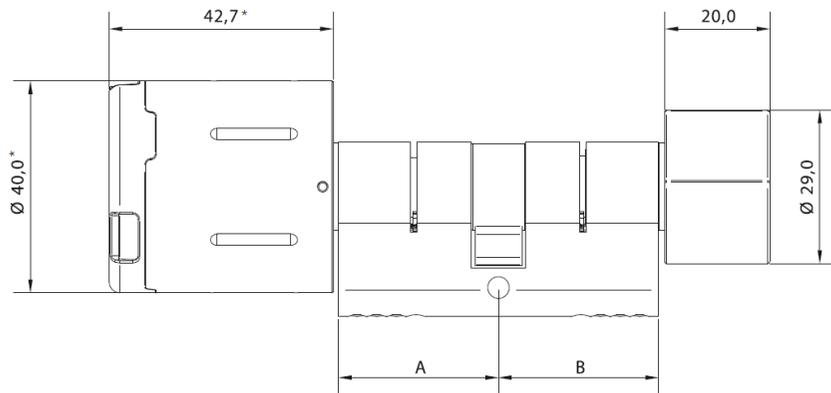

TECHNICAL DATA

Model	UZ-CX2122
Dimensions	Compliant with DIN 18252 standards
Available transponders versions	Mifare Classic, Mifare DESfire 13.56MHz, Legic prime and advant 13.56MHz, EM / HITAG 125kHz, radio transmitter 868MHz
Cylinder length	From 26/26 mm and / or 30/30 mm to 200/200 mm in 5 mm steps
Dimensions of the electronic knob module	Length 42.7mm, diameter 40mm
Dimensions of the mechanical knob	Length 20mm, diameter 29mm (or 34mm)
Protection level	IP54 (inside), IP66 (outside)
Power supply	2 * CR2 3V lithium battery
Battery life	80,000 cycles
Low power opening	Always possible with an external power source
Temperature in operating mode	+ 5 ° C to + 55 ° C (internal version) -25 ° C to + 65 ° C (outdoor version)
Storage temperature	-40 ° C to + 65 ° C
Appliance	On the inside and outside of the door (depending on version). Before installing outdoors, check the conditions there