



Tripod


BO-DSN50P-SS

TRIPOD

The main advantage of the BO-DSN50P-SS turnstile is that it does not need to be attached anywhere. The gateway can be freely moved to any place where there is a need to manage access control. The device is made of stainless steel and tempered glass. An additional advantage is the strip of LED lamps, which give the gate a modern and elegant design.

MAIN PRODUCT FEATURES

- ⊕ Long service life
- ⊕ High operational reliability
- ⊕ The device is characterized by quiet operation
- ⊕ Traffic can be unidirectional as well as bidirectional (depending on the version)
- ⊕ Automatic lock after 5 seconds (can be changed) if the passenger does not pass through the tripod
- ⊕ Anti-trailing function: only one person passes at a time
- ⊕ Automatic lowering of the arms in the event of a power cut
- ⊕ LED lamps (red × means no access; green → means open input)
- ⊕ Device can work inside and outside the building

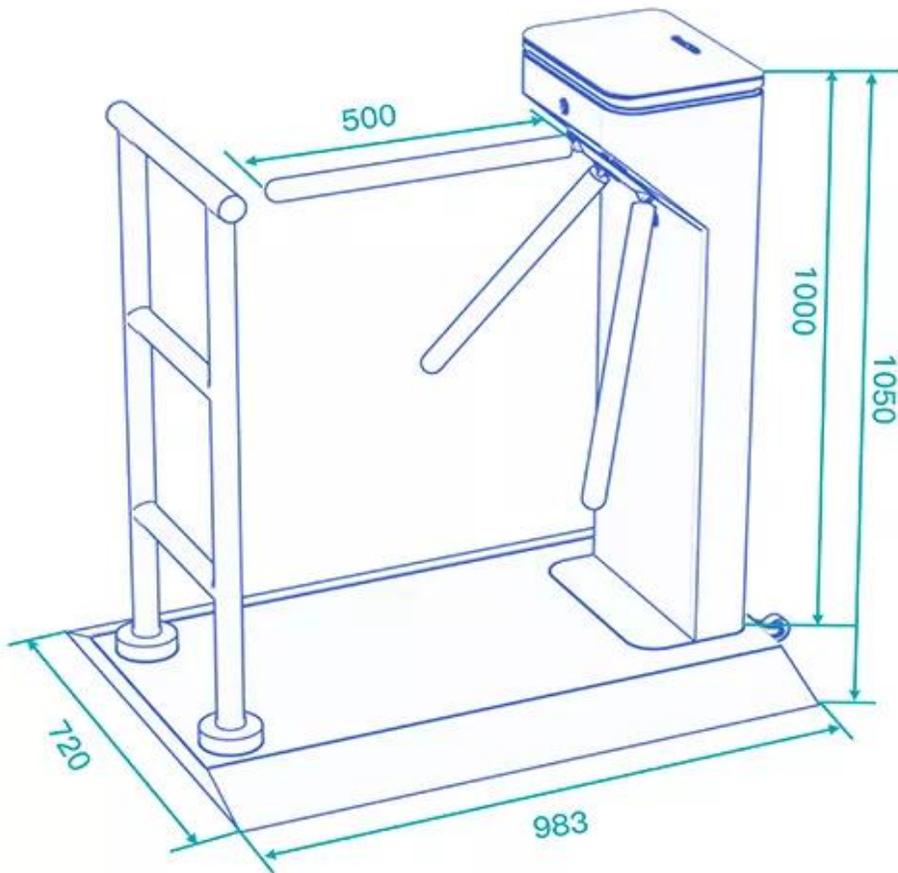

TECHNICAL DATA

Model	BO-DSN50P-SS
Body material	304 stainless steel + high quality black tempered glass
Arms material	30 stainless steel with rubber gasket
Tripod dimensions	360*260*980mm
Base dimensions	983*720*50mm
Weight	50kg
Passage width	550mm (Arm length: 500mm)
Passage direction	Unidirectional, bidirectional
Power supply	AC 220V/110V, 50/60Hz
Operational voltage	24V DC
Power consumption	40W
Working temperature	-15°C up to 60°C
Humidity	0 ~ 95%
Working environment	Internal, external
Throughput	40 persons per minute
Backlight	Strip of LED lamps (front+top+side)
Emergency mode	In case of power failure arms will be folded automatically
Integration	With any access control system
Communication	Dry contact, relay signal, RS485
Certificates	CE, ROHS