



Swing gate

BU-DS225ST-SS


AUTOMATIC SWING GATE

BU-DS225ST-SS is an automatic swing gate with an attractive appearance and reliable operation. The goal arm is made of stainless steel. The 900 mm wide passage makes the gate suitable for disabled people in a wheelchair. It is suitable for both internal and external installation. The gate can operate both one-way and two-way.

MAIN FEATURES

- ⊕ Long lifetime and high reliability
- ⊕ Low noise
- ⊕ Alarm function in case of an attempt to pass through the gate illegally
- ⊕ Only one person can pass through the gate in one cycle
- ⊕ Automatic lock function (if a passing person does not pass the gate within 5 seconds (can be adjusted), the arms will be blocked)
- ⊕ Anti-burglar function - turnstile is defaultly closed, it can be opened after receiving an opening signal
- ⊕ Passage will be opened automatically in case of power failure
- ⊕ Easy installation

AVAILABLE COLORS

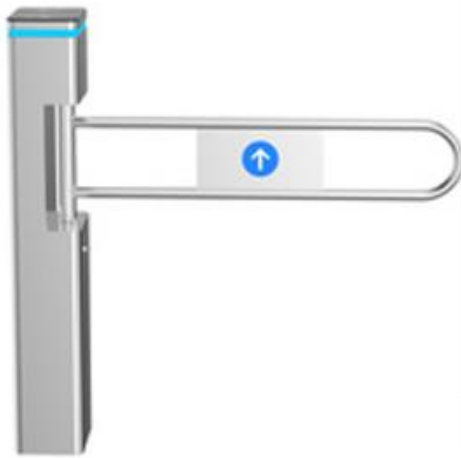

SILVER



BLACK

TECHNICAL DATA

Model	BU-DS225ST-SS
Finish	Stainless steel
Arm material	Stainless steel
Dimensions	230*1065*1050mm
Weight	25kg
Passage width	≤900mm
Passage direction	Unidirectional / Bidirectional
Power supply	AC220V/110V, 50/60Hz
Voltage	24V DC
Power consumption	20W
Working temperature	-20 °C - 75 °C
Humidity	0 ~ 95%
Working environment	Internal / External
Throughput	35-40 people per minute
LED indicator	Yes
Emergency mode	Passage will be opened automatically in case of power failure
Communication	Dry contact, signal relay, RS485

