


Entry one

X2 door-mounted readers

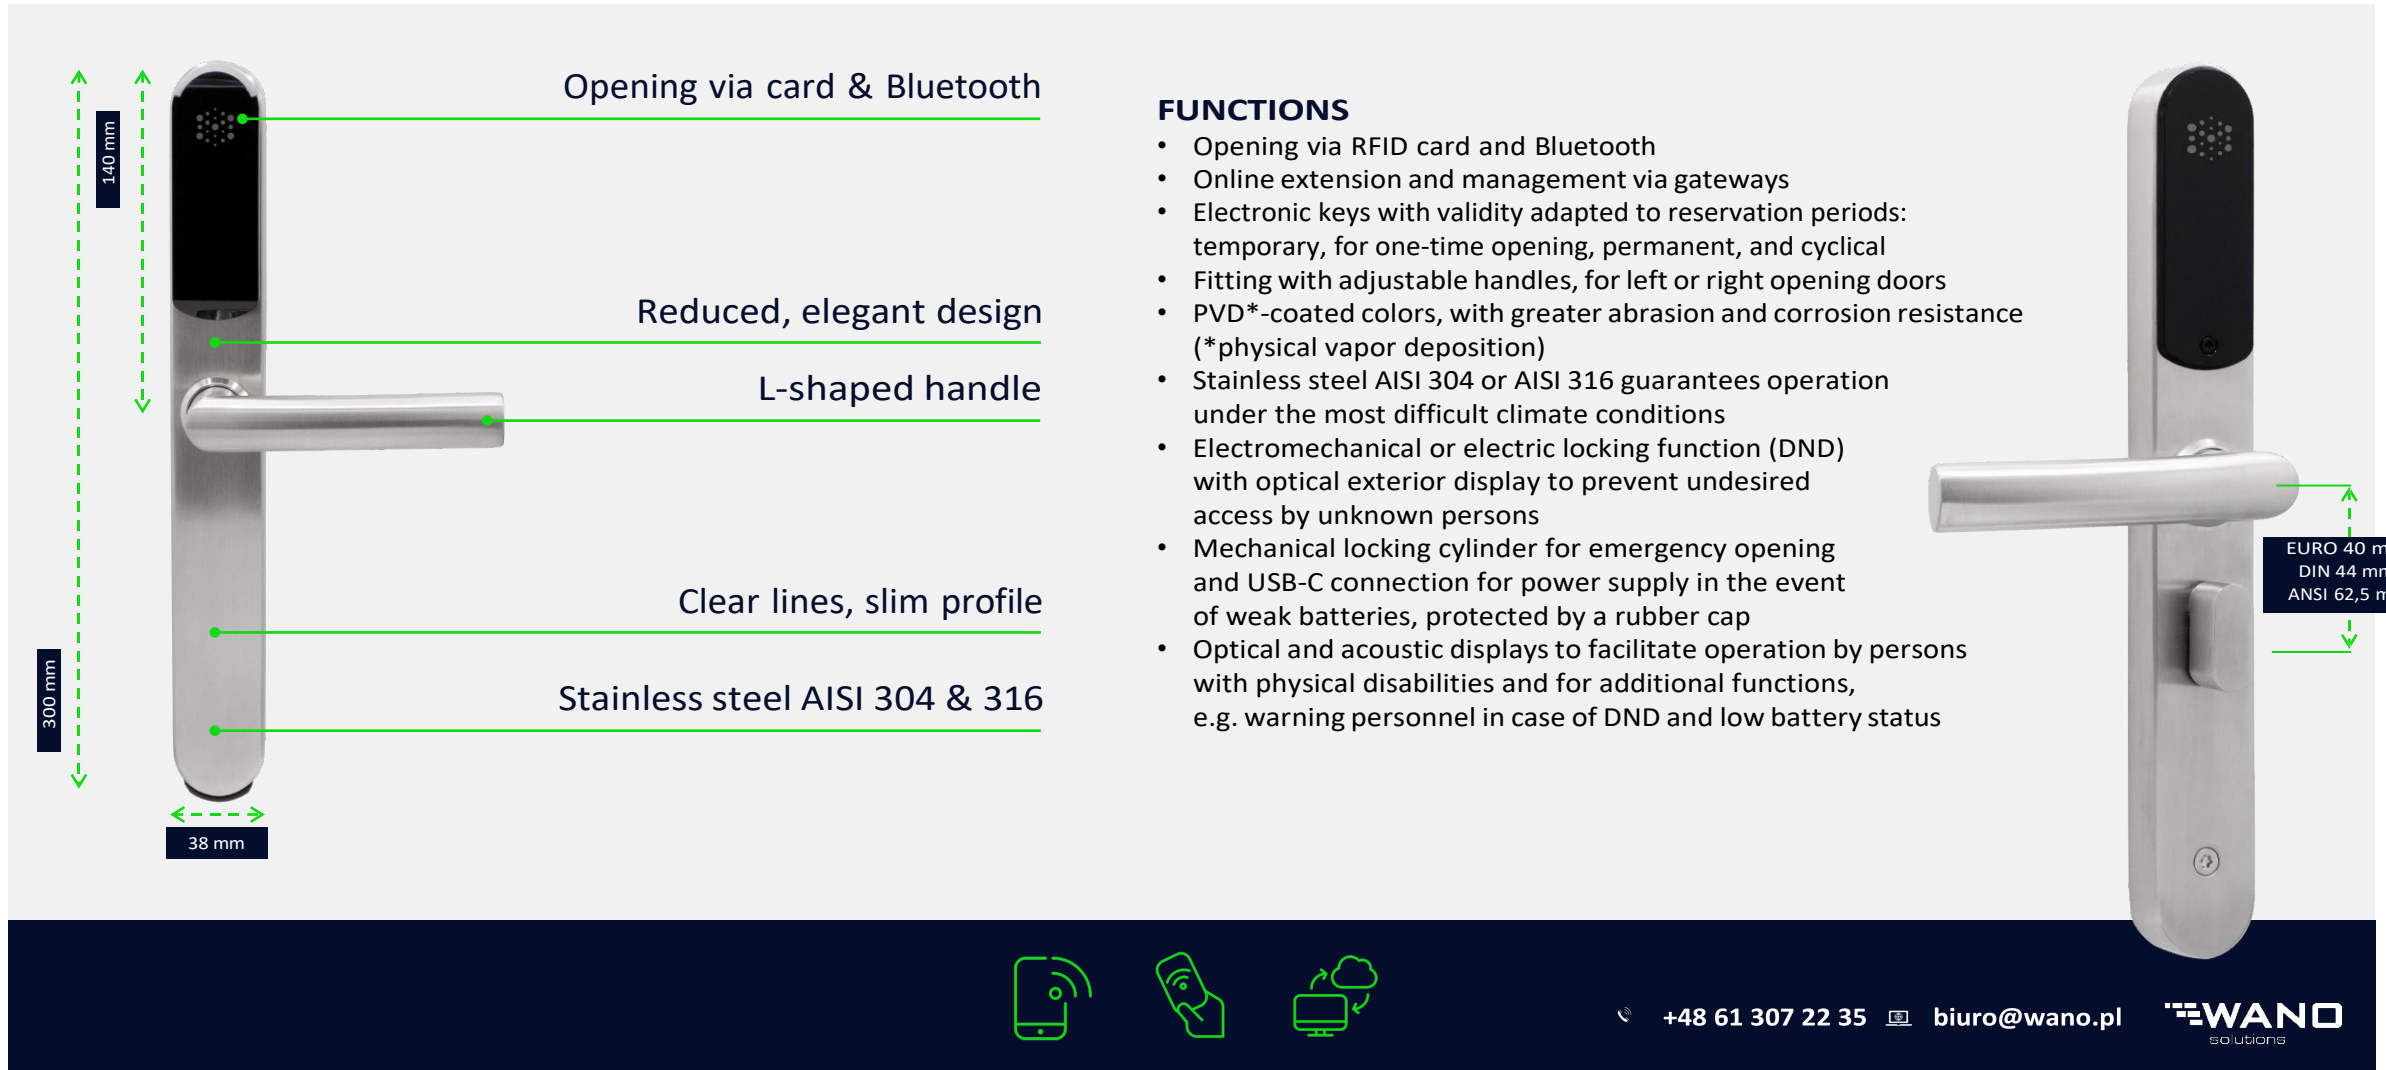

Opening via card & Bluetooth

140 mm

Reduced, elegant design

L-shaped handle

300 mm

Clear lines, slim profile

Stainless steel AISI 304 & 316

38 mm

EURO 40 mm
DIN 44 mm
ANSI 62,5 mm

FUNCTIONS

- Opening via RFID card and Bluetooth
- Online extension and management via gateways
- Electronic keys with validity adapted to reservation periods: temporary, for one-time opening, permanent, and cyclical
- Fitting with adjustable handles, for left or right opening doors
- PVD*-coated colors, with greater abrasion and corrosion resistance (*physical vapor deposition)
- Stainless steel AISI 304 or AISI 316 guarantees operation under the most difficult climate conditions
- Electromechanical or electric locking function (DND) with optical exterior display to prevent undesired access by unknown persons
- Mechanical locking cylinder for emergency opening and USB-C connection for power supply in the event of weak batteries, protected by a rubber cap
- Optical and acoustic displays to facilitate operation by persons with physical disabilities and for additional functions, e.g. warning personnel in case of DND and low battery status

+48 61 307 22 35 biuro@wano.pl 