




Digilock Cabinet Lock Curve RFID

An RFID electronic lock (13.56 MHz) with a slim 0.41" (10.35 mm) profile and a fully metal housing in brushed nickel or black finish. The capacitive wake function enables touch-free activation, while visual and audio indicators along with auto-unlock enhance user convenience. The lock can operate in either Shared Use or Assigned Use mode, with management through the Basic or Advanced system. With IP55 resistance and full ADA compliance, it is a robust solution for modern access control systems.


MAIN PRODUCT FEATURES

- ◎ Slim profile – only 0.41" (10.35 mm)
- ◎ RFID 13.56 MHz; compliant with ISO 14443A/B, ISO 15693; compatible with HID™ iCLASS™, MIFARE® (Classic 1K/4K, Ultralight, DESFire EV1/EV2, Plus S), FeliCa, LEGIC Advant, HID™ SEOS™
- ◎ Capacitive wake – touch-free activation
- ◎ Auto-unlock + LED and audio indicators
- ◎ Durable metal housing; finishes: brushed nickel or black
- ◎ Two modes: Shared Use / Assigned Use; management via Basic/Advanced system
- ◎ 12.7 mm (½") motorized deadbolt
- ◎ Powered by 4x premium AA batteries
- ◎ IP55 protection rating, certified FCC, CE, IC


Top View-Cable

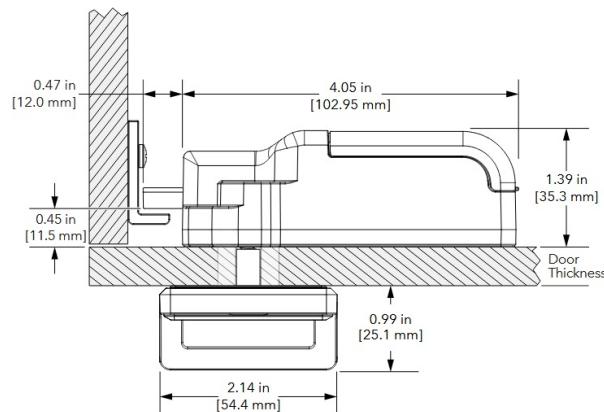


Side View-Cable

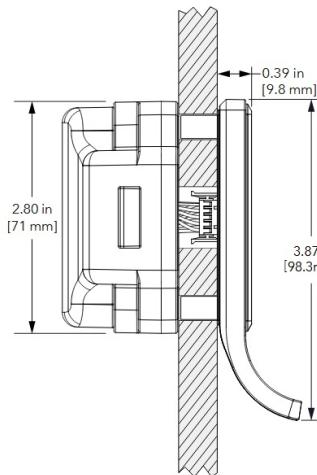

Front View

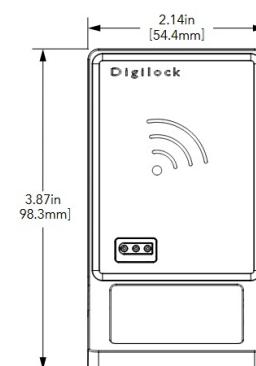

Top View-Pin Connector

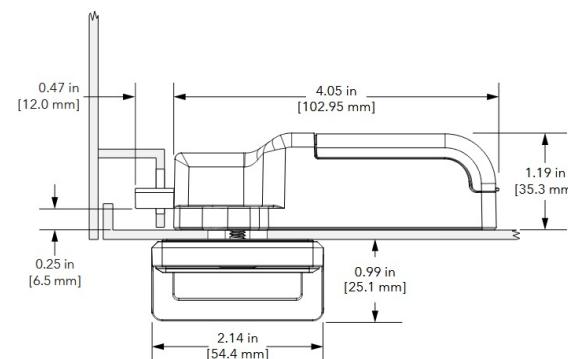

Side View-Pin Connector

