

Swing gate

BU-DS8000-FR-SS

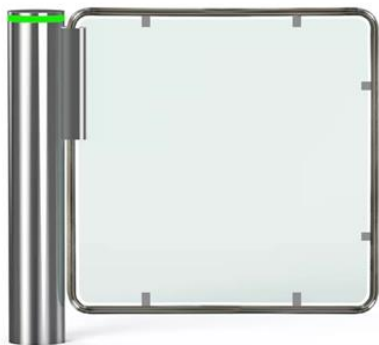
AUTOMATIC SWING GATE

BU-DS8000-FR-SS is an elegant tilting gate with a passage width of 900mm, which complies with the standards of passage for people on wheelchairs. In an emergency, the device can be used as an emergency exit. It can work both in one and two directions.

MAIN FEATURES

- ⊕ Long lifetime and high reliability
- ⊕ It has an alarm function in case of unauthorized passage through the gate
- ⊕ Anti-burglar function (turnstile is defaultly closed unless it get opening signal)
- ⊕ Anti-trailing function guarantee that none will pass through the turnstile without using RFID card
- ⊕ If the passenger does not pass through the gate within 5 seconds (can be adjusted), the passage will be locked automatically
- ⊕ Passage will be opened automatically in case of power failure

AVAILABLE COLORS

**SILVER****BLACK**

TECHNICAL DATA

Model	BU-DS8000-FR-SS
Materials	Stainless steel 304 (and plexiglass)
Weight	60kg
Passage width	600-900mm
Passage direction	Unidirectional / Bidirectional
Power supply	AC220V/110V, 50/60Hz
Operational voltage	24V DC
Power consumption	40W
Working temperature	-15°C - 60°C
Humidity	95%
Working environment	External / Internal
Throughput	30 people per minute
Emergency function	Passage will be opened automatically in case of power failure
Communication	Dry contact, relay signal, RS485