



Entrance Mortise Lock


FireLock 6572Z

ENTRANCE MORTISE LOCK

FireLock 6572Z Entrance Mortise Lock is a high-quality lock designed for fire-rated doors, compliant with strict European standards. Made of durable SS304 stainless steel, it ensures reliability, safety, and long service life in commercial buildings, offices, and public facilities.

MAIN PRODUCT FEATURES

- ⦿ Certified for fire-rated doors (EN12209, EN1634-1)
- ⦿ High fire resistance (up to 260 minutes for steel doors)
- ⦿ Robust SS304 stainless steel construction
- ⦿ Durability: up to 200,000 cycles
- ⦿ Double-throw deadbolt for enhanced security

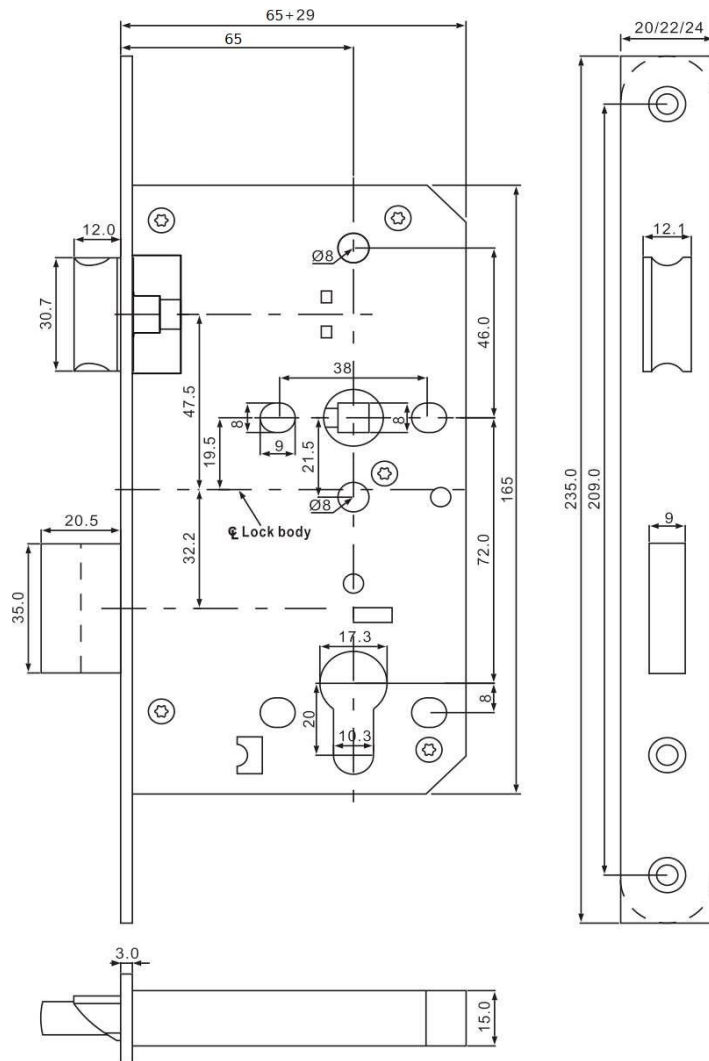

TECHNICAL DATA

Model	FireLock 6572Z
Lock type	Mortise lock
Application	Fire-rated doors
Centre distance	72 mm
Backset	65 mm
Case material	Galvanized steel SECC
Case thickness	1.5 mm
Latch	SS304
Latch durability	200,000 cycles
Latch load	120 N
Deadbolt	SS304, 2 throws
Deadbolt durability	50,000 cycles
Forend	SS304, 235 mm (various widths)
Strike plate	SS304, 1.5 mm
Follower	SS304, 8×8 mm
Standards	EN12209 / EN1634-1 / DIN18251
CE classification	3 X 9 1 0 G 3 B C 2 0
Fire resistance	260 min (steel door), 111 min (timber door)