

## Entrance Mortise Lock

### FireLock 5572Z




#### ENTRANCE MORTISE LOCK

FireLock 5572Z Entrance Mortise Lock is a high-quality lock designed for fire-rated doors, compliant with strict European standards. Made of durable SS304 stainless steel, it ensures reliability, safety, and long service life in commercial buildings, offices, and public facilities.

#### MAIN PRODUCT FEATURES

- ⊕ Certified for fire-rated doors (EN12209, EN1634-1)
- ⊕ High fire resistance (up to 260 minutes for steel doors)
- ⊕ Robust SS304 stainless steel construction
- ⊕ Durability: up to 200,000 cycles
- ⊕ Double-throw deadbolt for enhanced security

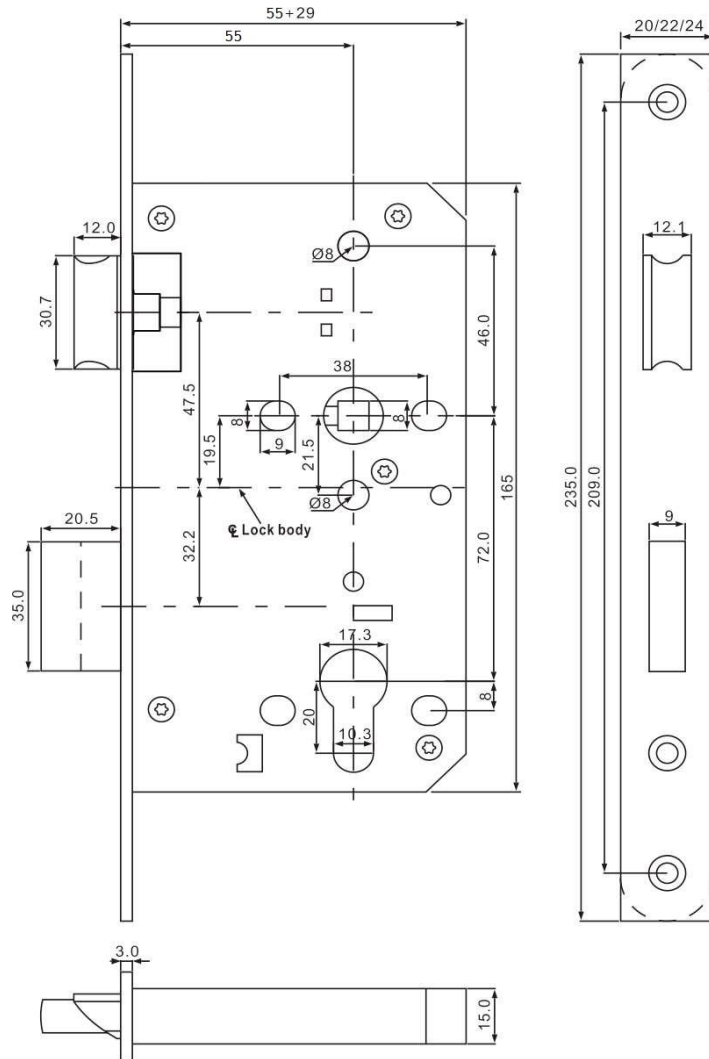

## TECHNICAL DATA

Model	FireLock 5572Z
Lock type	Mortise lock
Application	Fire-rated doors
Centre distance	72 mm
Backset	55 mm
Case material	Galvanized steel SECC
Case thickness	1.5 mm
Latch	SS304
Latch durability	200,000 cycles
Latch load	120 N
Deadbolt	SS304, 2 throws
Deadbolt durability	50,000 cycles
Forend	SS304, 235 mm (various widths)
Strike plate	SS304, 1.5 mm
Follower	SS304, 8×8 mm
Standards	EN12209 / EN1634-1 / DIN18251
CE classification	3 X 9 1 0 G 3 B C 2 0
Fire resistance	260 min (steel door), 111 min (timber door)