


## Surface-mounted exit button

### PW-ON

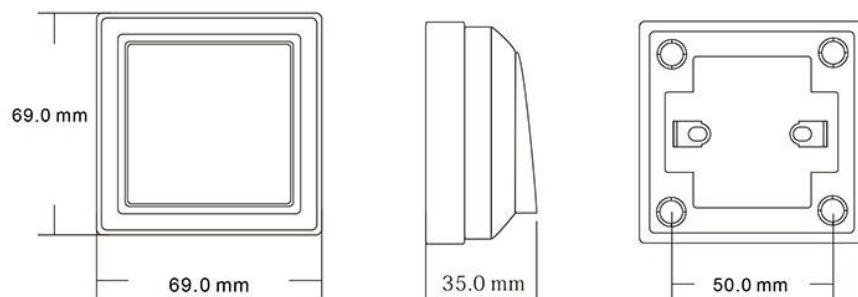

### SURFACE-MOUNTED EXIT BUTTON

The PW-ON surface-mounted exit button is a compact and durable solution for exit control in access control systems. With its fireproof housing and simple surface installation, it ensures reliable operation in various environments.

### DANE TECHNICZNE

Model	PW-ON
Type	Surface-mounted exit button
Material	Fireproof
Installation	Surface mount
Power supply	DC 12V
Contact rating	3A / 125–250V AC
Output contacts	NO / COM
Dimensions	69 x 69 mm
Mechanical life	500,000 cycles
Application	Hollow doors
Operating temperature	-20°C to +55°C
Operating humidity	0–95%
Unit weight	0.1 kg