


## Flush-mounted exit button

### PW-IN

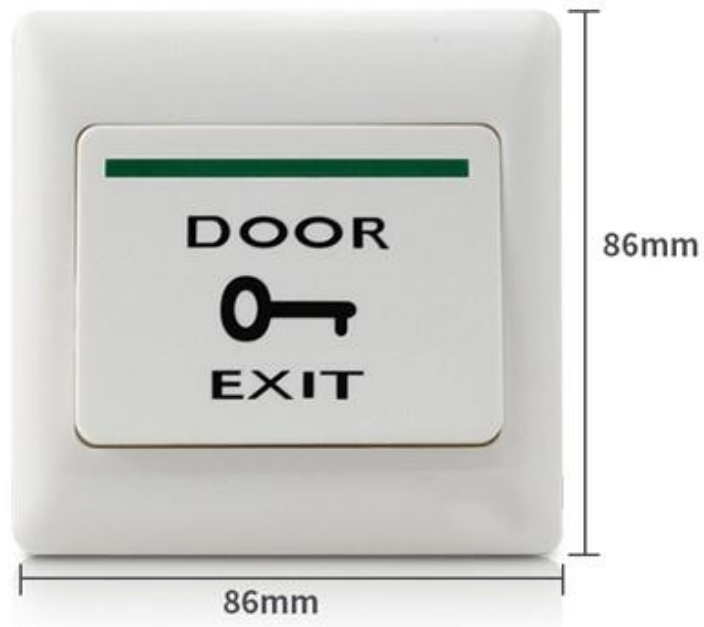

### FLUSH-MOUNTED EXIT BUTTON

The PW-IN flush-mounted exit button is an aesthetic and durable solution for exit control in access control systems. Designed for flush installation, it ensures a discreet appearance and reliable operation thanks to its fireproof housing.

### TECHNICAL DATA

Model	PW-IN
Type	Flush-mounted exit button
Material	Fireproof
Installation	Flush mount
Power supply	DC 12V
Contact rating	3A / 125–250V AC
Output contacts	NO / COM
Dimensions	86 x 86 mm
Mechanical life	500,000 cycles
Application	Hollow doors
Operating temperature	-20°C to +55°C
Operating humidity	0–95%
Unit weight	0.1 kg